

Liebert® PSA

Performance Power Protection For PC's And Office Equipment



The Liebert PSA is a compact line-interactive UPS that offers cost-effective, full-featured power protection for small office computers and electronic equipment. Liebert PSA offers unique features and extraordinary performance.

Designed with simple controls for easy operation, the Liebert PSA provides up to five minutes of back-up time at full load... more than enough time to save work in process and shut down your system. Shutdown software and a USB cable are also included, to allow remote alerts and automated graceful shutdown of the connected systems.

Liebert PSA UPS Supports Your Sensitive Electronics With These Standard Features:

Flexibility:

- Available in four sizes, including 500, 650, 1000 and 1500VA ; 120VAC or 230VAC
- Three to six battery-backed UPS outlets, depending on model size
- One to two surge-only outlets, differentiated by color
- USB communications/shutdown software and cable included
- User replaceable batteries

Reliability:

- Up to five minutes of battery backup time at full load
- Full sequenced battery testing to ensure batteries are available when needed
- Advance early warning of UPS shutdown
- Lightning and surge protection (TVSS)
- RJ-45 port for data line surge protection

Low Total Cost Of Ownership:

- Two-Year warranty standard

The Liebert PSA Is Ideally Suited For:


- Professional Desktop PC's
- Professional Workstations
- Small Routers, Bridges and Hubs
- Point-of-Sale Terminals
- Other Sensitive Electronics



Liebert® PSA Specifications

Model Number	PSA500MT3-230U	PSA650MT3-230U	PSA1000MT3-230U	PSA1500MT3-230U
Capacity VA/W	500/300	650/390	1000 / 600	1500 / 900
Net Weight: kg	5.4	5.9	9.5	11.6
Shipping Weight: kg	6.3	6.8	10.7	12.8
Dimensions: W x D x H, mm	95x356x171		147 x 360 x 234	
On-Line Mains Voltage	160-287VAC			
On-Line Frequency	50/60Hz ±5Hz			
Output Voltage (Mains Normal)	Typical 185-252VAC			
Output Voltage (Battery Operation)	230VAC ±5%			
On-Battery Wave Form	Stepped Sinewave			
Battery Type - VDC x Ah - Quantity	12V x 7.2Ah x 1		12V x 7.2Ah x 2	12V x 9Ah x 2
Typical Recharge Time	6-8 hours to 90%			
Battery Run Time* (Full load)	3-5 minutes			
Battery Run Time* (Half load)	10-13 minutes			
Audible and Visual	Audible alarm / LED			
Backup Sockets	IEC 320 C13 (3)		IEC 320 C13 (6)	
Surge Sockets	IEC 320 C13 (1)		IEC 320 C13 (2)	
Operating Temperature, °C	0 to 40			
Storage Temperature, °C	-15 to 40			
Operating / Storage Relative Humidity	0%-90%, non-condensing			
EMI Classification	Class B			
Agency				
Safety	IEC62040-1-1			
Transportation	ISTA Procedure 1A Certification			
Warranty	2 years standard (+ 1 year warranty extension available)			
Packaging	User Manual on CD, Software CD, USB cable, Safety Instruction Sheet, Environment protection sheet, (2) IEC output cables for 500/650VA, (3) IEC output cables for 1000/1500 VA			

*Battery run time may vary depending on load

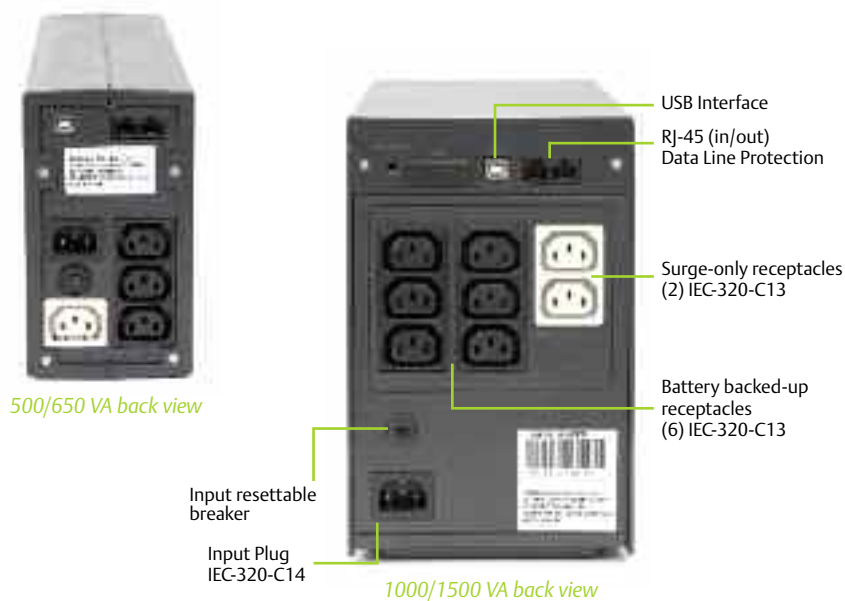

Communications/Shutdown Software:

Windows (98 and later) built-in power management functions provide monitoring of UPS status and manage the automatic orderly shutdown of the computer if a power outage ever exceeds the battery capacity of the UPS. Liebert USB shutdown and monitoring software is provided.

Locations

Emerson Network Power - Headquarter EMEA
Via Leonardo Da Vinci 16/18
Zona Industriale Tognana
35028 Piove Di Sacco (PD) Italy
Tel: +39 049 9719 111
Fax: +39 049 5841 257
marketing.emea@emersonnetworkpower.com
www.eu.emersonnetworkpower.com

Emerson Network Power - Service EMEA
Via Leonardo Da Vinci 16/18
Zona Industriale Tognana
35028 Piove Di Sacco (PD) Italy
Tel: +39 049 9719 111
Fax: +39 049 9719045
service.emea@emersonnetworkpower.com

United States
1050 Dearborn Drive
P.O. Box 29186
Columbus, OH 43229
Tel: +1 614 8880246

Asia
7/F, Dah Sing Financial Centre
108 Gloucester Road, Wanchai
Hong Kong
Tel: +852 2572220
Fax: +852 28029250



While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2010 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

© Liebert is a registered trademark of the Liebert Corporation.

PSA3G-FLY-EN-0909-01

Emerson Network Power™
The global leader in enabling
Business-Critical Continuity™

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

Emerson Network Power.com

Business-Critical Continuity, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2010 Emerson Electric Co.